


## Indoor Drop cable

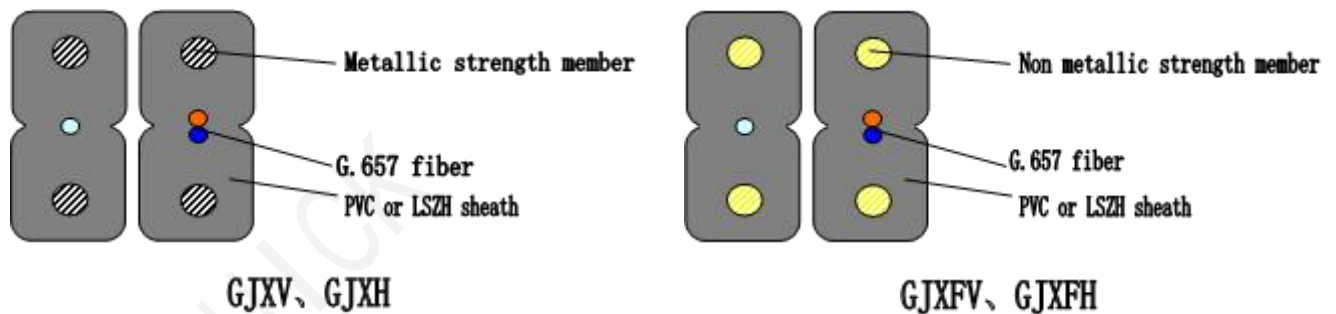

Application: Indoor/outdoor distribution

Storage temperature:  $-5^{\circ}\text{C} \sim +50^{\circ}\text{C}$ ;

Operating temperature:  $-50^{\circ}\text{C} \sim +50^{\circ}\text{C}$

Installation temperature:  $\nless -15^{\circ}\text{C}$

Technical parameters

Model	Cable cores	Overall diameter of cable (mm)	Diameter of strength member (mm)	Min bending radius (mm)		Tension allowed(N)		Crush resistance (long term/short term) (N/100mm)
				Static	Dynamic	Short term	Long term	
GJXV GJXH	1-4	2.0×3.0±0.1	0.4×2pcs	20	40	120	60	1000/2200
GJXFV GJXFH	1-4	2.0×3.0±0.1	0.5×2pcs	20	40	120	60	1000/2200