


RG 304

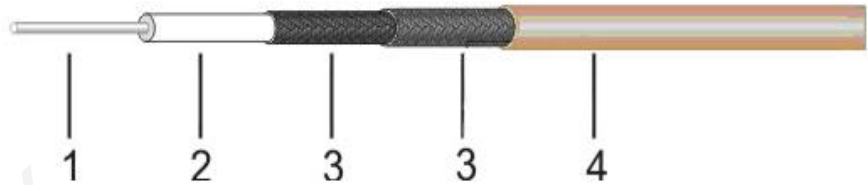

Construction Specification

	Material	Diameter(mm)
1. Inner Conductor	Silver Plated Copper Clad Steel	1.50
2. Dielectric	PTFE	4.70
3. Outer Conductor	Double Silver Plated Copper Braid	5.70
4. Jacket	FEP	7.11

Electrical Characteristics

Impedance(Ohm)	50
Capacitance(pF/m)	96
Velocity(%)	70
Bending Radius(mm)	36
Max.Oper. Voltage(VMS)	3000
Max.Oper. Frequency (MHz)	12000
Operating Temp. (°C)	-55~+200

Attenuation(Typical)

Frequency(MHz)	Attenuation(dB/m)
100	0.082
400	0.174
1000	0.289
3000	0.551
5000	0.755